

SERIES CARUS ARGOS

IP FRONT DOOR STATION VIDEO

FLUSH-MOUNT

TCS:
IP

Up to 1000 phone entries

Bright 5,7" LC Display

SIP compatible

Full duplex voice transmission

130° camera with 1,3megapixel CMOS sensor

Intuitively operable touch screen

High-quality echo suppression

Integrated RFID reader with Mifare technology

Code lock via keypad

Power supply via PoE

Alloy silver, black or bronze



VARIANTS



IP FRONT DOOR STATION VIDEO

Item no.

Alloy, anodized silver

[CAE3002-IP-0150](#)

Alloy, anodized black

[CAE3002-IP-0156](#)

Alloy, anodized bronze

[CAE3002-IP-0151](#)

ACCESSORY

Item no.

ARGOS-AMI-Integration frame

[on request](#)

SERIES CARUS ARGOS

PRODUCT FEATURES

- > SIP-Door station for video communication with SIP-phones and access control
- > Mounting: wall-mount/flush-mount
- > Material (housing): Alloy, massive
- > Housing-surface: anodized silver, anodized bronze or anodized black
- > Display-type: 5.7 inch touch display
- > Monitor-brightness: controlled by ambient light
- > Starting screen can be individualized by software
- > RFID-Reader: integrated
- > Codelock: integrated
- > Database: integrated for 1000 users
- > Full duplex voice transmission with echo cancellation
- > Video-resolution: VGA/CIF
- > Ethernet-Interface: 10/100 BaseT (RJ45 Socket)
- > Protocols: SIP, TCP/UDP/IP, http, DNS, NTP, DHCP

CAMERA-FEATURES

- > Camera: 1,3 Megapixel CMOS sensor
- > Capture-Angle: 130° (wide angle)
- > Electronic PTZ
- > Picture-Rate: up to 30 frames per second
- > Automatic Day/Night switching

EXTENDED FEATURES

- > Audio-Codec: G.711 / G.729
- > Frequency: 200 to 16.000Hz
- > Video-Compression: H.264 / MJPEG / JPEG
- > RFID and Codelock in Combination: possible

- > Configuration: LCD-screen or webinterface
- > Allocation of Events and Actions
- > Events: Access / Tamper / SIP
- > Actions: PTZ, Snapshot, Relais, SIP
- > Wigand-Interface
- > Relais: 1x (Door opener)
- > 2-wire Interface
- > Registrar-Server: integrated (Peer to Peer)

TECHNICAL DATA



- > Technology: IP-Network technology
- > Power Supply: PoE, or 12-56VDC (at 2-wire-mode)
- > Power Consumption: max. 10W
- > Housing: 345 x 192 x 13 (49)mm
- > Ambient Temperature Limit: -20 to +60° Celsius
- > Degree of Protection: IP65

SCOPE OF DELIVERY

- > Housing for Wall-Mount/ Flush-Mount
- > Assembly Kit

 www.tcsag.de/en/products

DIMENSIONS (IN MM)

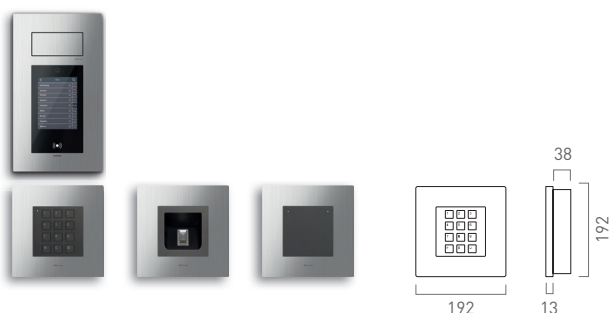

ACCESSORY

ARGOS-AMI-Integration frame for 1 AMI-module

- > Codelock module
- > Fingerprint scanner module
- > Transponder reader module

CONTACT US

In case of any questions on planning,
please contact our technical hotline

Phone +49 4194 9881-188
(German landline)

Send your inquiry to

Fax +49 4194 9881-189
Email hotline@tcsag.de