DATASHEET

Wir öffnen Welten

FLOOR VIDEO SWITCH (FLUSH-MOUNT)

EXTENDED FUNCTION

SWITCHING

Example application

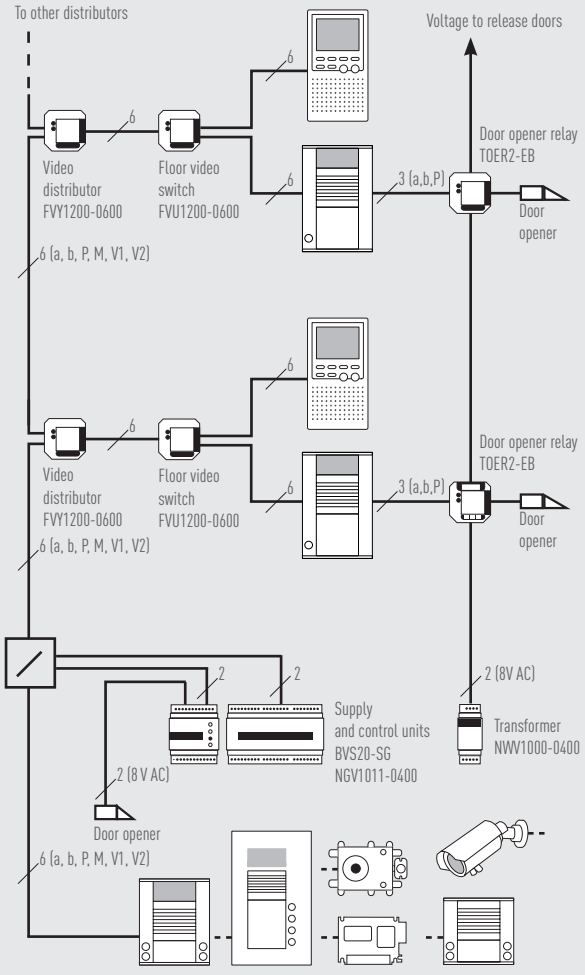

TCS: BUS

The floor video switch is used for the specific switch-over between a floor video front-door station and main video front-door station to a video indoor station. It may only be used in conjunction with a video signal distributor.

H x W x D in mm	Article no.
52 x 52 x 23	FVU1200-0600

FVU1200-0600

PRODUCT FEATURES

- For the specific switch-over between a floor video front-door station and main video front-door station to a video indoor station
- Only in combination with video signal distributor
- Connection via connection terminal / screw terminal
- Number of low current switch contacts: 2
- Type of mounting: Mounting in flush-mount box, distributor boxes
- Type of housing: built-in housing

Bracket for DIN-rail included

TECHNICAL DATA

- Protection category: IP20
- Supply voltage: 26 V
- Input current: max. 15 mA
- Built-in housing H x W x D mm: 52 x 52 x 23
- Acceptable ambient temperature: -20 to +50°C

http://www.tcsag.de/en/products

CONTACTS

For design queries, please contact the technical hotline

Phone +49 (0)4194 9881-188
(German landline)

Please direct your queries to

Fax +49 (0)4194 9881-189
E-mail hotline@tcsag.de

Version on going to print 02-2019 | Subject to change without notice. | Art. VF9421, Version 2.0