

TASTA AUDIO

AUDIO INDOOR STATION

WALL-MOUNT



TCS:
BUS



Specific opening of front door and floor door

With ambient lighting

Signalling of the ring tone via LED-display
or ambient lighting

Signalling of the ring tone cancellation via
LED-display

SmartSlot can be ordered as an extension

Radio signal unit can be ordered for additional signalling
of the front door call

INDOOR STATION Article no.

TASTA Audio with mounting cover* [ISW5010-0145](#)

ACCESSORIES Article no.

Desktop accessory for TASTA Audio + Video [ZIT5000-0030](#)

Desktop accessory for TASTA Audio [ZIT5001-0086](#)

TASTA Audio mounting cover* [ZIA5001-0145](#)

TASTA mounting plate [ZIA5003-0145](#)

EXTENSIONS WITH SMARTSLOT Article no.

Radio signal unit for series TASTA [FFL2200-0](#)

Plug-in radio transmitter board [FFL0004-0000](#)

RCP04E plug-in socket radio bell [FFL0001-0000](#)

RCP09 plug-in socket radio bell
acknowledgement function [FFL0003-0000](#)

* Mounting cover included in delivery

TASTA AUDIO

PRODUCT FEATURES

- > Audio indoor station for hands-free talking
- > Type of mounting: wall-mount on flush-mount box
- > Type of housing: wall-mounted housing
- > Housing material: plastic (ASA)
- > Colour of housing: white
- > Mounting cover: can be pre-installed with inserted screw terminal
- > Number of acoustic call distinctions: 4 (up to two of which from front-door stations)
- > Voice transmission: hands-free talking / push-to-talk communication can be activated
- > Number of selectable ring tones: 13
- > Automatic hands-free talking after internal call: can be activated
- > Audio privacy function: yes
- > Automatic call cut-off: yes
- > Ring tone mute: on call-OFF button
- > Ring tone volume: adjustable
- > Volume voice output: adjustable
- > Door release function: on door release button
- > Light switch function: on light switch button

EXTENDED SETTINGS

- > Control function: on function key
- > Parallel call: can be activated
- > Internal call: can be activated
- > Automatic door release: can be activated
- > Call diversion: can be activated
- > Floor door release function: can be activated
- > LED (red): ring tone mute
- > LED (green): door and internal calls (short-term memory), display of a busy line
- > Extendible functionality: SmartSlot, radio signal unit
- > Installation mix of audio, video and access in one system: possible

- > Error indication: optical/acoustic (total error indication on all LEDs)
- > Commissioning and configuration: manual, with service device, with configuration software

TECHNICAL DATA

- > Technology: TCS:BUS
- > Number of wires: 2 or 3 wires possible
- > Current consumption, in standby: 1.68 mA
- > Current consumption, maximum: 103 mA
- > Wall-mounted housing H x W x D mm: 105 x 94 x 21/17
- > Acceptable ambient temperature: -5 to +40°C
- > Protection category: IP30

 <https://www.tcsag.de/en/products>

ACCESSORIES



Desktop accessory for TASTA Audio and Video



Desktop accessory for TASTA Audio




TASTA mounting cover for mounting on wall and flush-mount socket (included in delivery)



TASTA mounting plate for mounting on flush-mount socket

DIMENSIONS (IN MM)

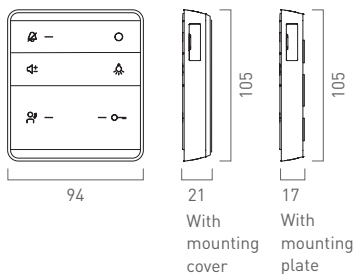

EXTENSIONS



Radio signal unit for series TASTA



Plug-in radio transmitter board

CONTACTS

For design queries, please contact the technical hotline

Phone +49 (0)4194 9881-188
(German landline)

Please direct your queries to

Fax +49 (0)4194 9881-189

E-mail hotline@tcsag.de

Don't forget to check whether subsidies or funding are available!

 <http://www.tcsag.de/kfw>