


TASTA AUDIO PLUS

AUDIO INDOOR STATION

WALL-MOUNT

TCS:
BUS

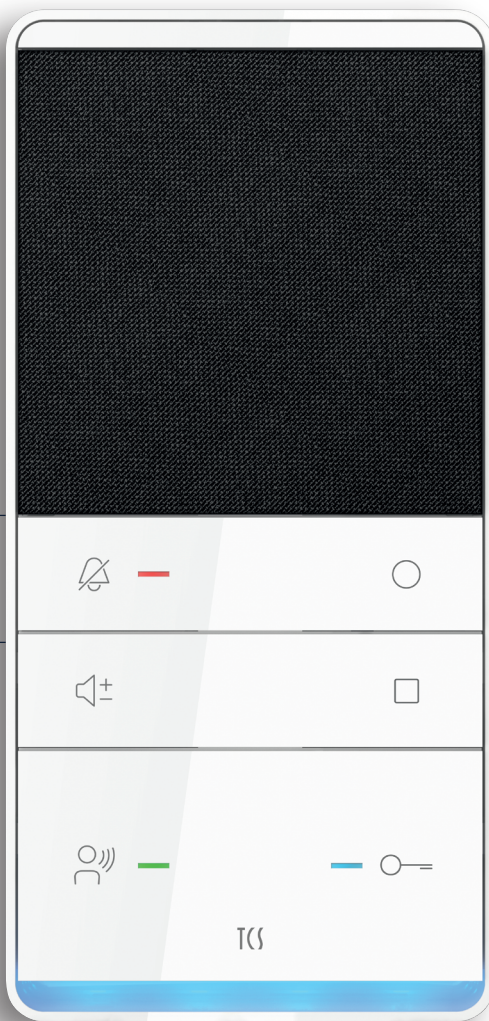

MOUNTING
PLACE FOR
SMARTSLOT

- Specific opening of front door and floor door
- With ambient lighting
- Loudspeaker with fabric covering
- Signalling of the ring tone via LED and ambient lighting (can be (de-)activated)
- Signalling of the ring tone cancellation via LED-display
- SmartSlot can be ordered as an extension
- Radio signal unit can be ordered for additional signalling of the front door call

INDOOR STATION	Article no.
----------------	-------------

TASTA Audio Plus*	ISW5030-0145
-------------------	------------------------------

ACCESSORIES	Article no.
-------------	-------------

Desktop accessory	ZIT5000-0030
-------------------	------------------------------

EXTENSIONS WITH SMARTSLOT	Article no.
---------------------------	-------------

Radio signal unit for series TASTA	FFL2200-0
------------------------------------	---------------------------

Plug-in radio transmitter board	FFL0004-0000
---------------------------------	------------------------------

RCP04E plug-in socket radio bell	FFL0001-0000
----------------------------------	------------------------------

RCP09 plug-in socket radio bell acknowledgement function	FFL0003-0000
--	------------------------------

* Mounting cover included in delivery

EXTENSIONS



Radio signal unit
for series TASTA



Plug-in
radio transmitter board

TASTA AUDIO PLUS

PRODUCT FEATURES

- > Audio indoor station for hands-free talking
- > Type of mounting: wall-mount on flush-mount box
- > Type of housing: wall-mounted housing
- > Housing material: plastic (ASA)
- > Colour of housing: white, polished
- > Mounting cover: can be pre-installed with inserted screw terminal
- > Number of acoustic call distinctions: 4 (up to 2 front doors, flat door and internal call)
- > Voice transmission: hands-free talking / push-to-talk communication can be activated
- > Number of selectable ring tones: 13
- > Automatic hands-free talking after internal call: can be activated with configo™
- > Audio privacy function: yes
- > Automatic call cut-off: yes
- > Ring tone mute: on call-OFF button
- > Ring tone volume: adjustable
- > Volume voice output: can be adjusted by user in 4 steps
- > Door release function: on door release button
- > Light switch function: on light switch button

EXTENDED SETTINGS


- > Control function: on function key
- > Parallel call: can be activated
- > Internal call: can be activated
- > Automatic door release: can be activated
- > Call diversion: can be activated
- > Floor door release function: can be activated
- > LED (red): ring tone mute
- > LED (green): door and internal calls (short-term memory), display of a busy line
- > Extendible functionality: Plug-in radio transmitter board, radio signal unit SmartSlot
- > Installation mix of audio, video and access in one system: possible
- > Error indication: optical/acoustic (total error indication on all LEDs)
- > Commissioning and configuration: manual, with service device, with configuration software configo™

TECHNICAL DATA

- > Technology: TCS:BUS
- > Number of wires: 2 or 3 wires possible
- > Current consumption, in standby: 2-wire I(a in standby) = 2.00 mA, 3-wire: I(a in standby) = 0.15 mA, I(P in standby) = 1.80 mA
- > Current consumption, maximum: 2-wire: I(a max) = 74 mA, 3-wire: I(P max) = 74.5 mA
- > Wall-mounted housing H x W x D mm: 194 x 94 x 21
- > Acceptable ambient temperature: -5 to +40°C
- > Protection category: IP30

 <https://www.tcsag.de/en/products>

DIMENSIONS (IN MM)



ACCESSORIES



CONTACTS

For design queries, please contact the technical hotline

Phone +49 (0)4194 9881-188
(German landline)

Please direct your queries to

Fax +49 (0)4194 9881-189
E-mail hotline@tcsag.de

Don't forget to check whether subsidies or funding are available!

 <http://www.tcsag.de/kfw>