


TASTA AUDIO IP

IP AUDIO INDOOR STATION

WALL-MOUNT

TCS:
IP

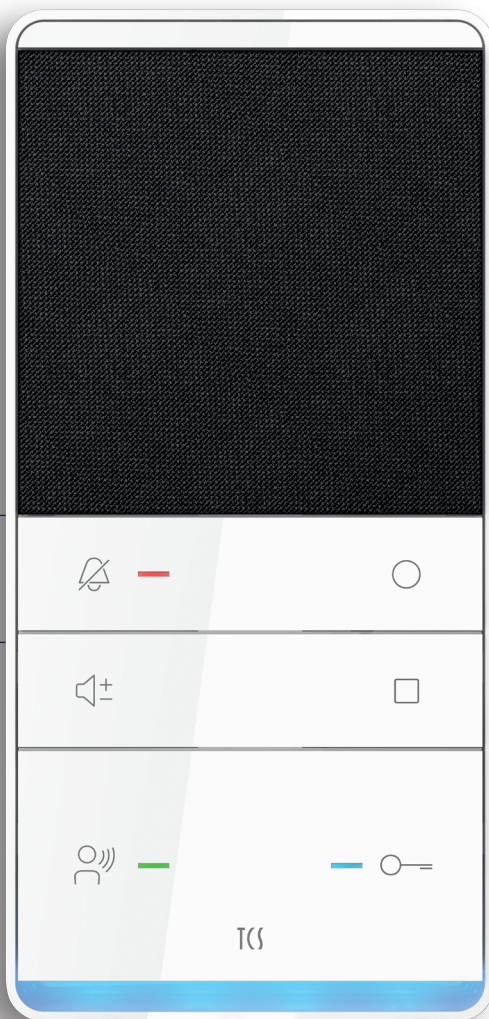

MOUNTING
PLACE FOR
SMARTSLOT

The TASTA IP indoor stations offer an outstanding design and can be integrated along with other devices into IP-based systems. The dimensions of the audio and video devices are the same, making it possible to subsequently exchange an audio device for a video device. In the audio version, the space for the video image is occupied by a loudspeaker grille.

With ambient lighting and orientation light

Signalling of a door call is possible via the ambient lighting

Visual display of door calls and ring tone cancellation via LED-displays

SmartSlot can be ordered as an extension

Radio signal unit can be ordered for additional signalling of the front door call

EXTENSIONS



Radio signal unit
for series TASTA



Plug-in
radio transmitter board

INDOOR STATION	Article no.
TASTA Audio IP	ISW5410-0145
ACCESSORIES	Article no.
Desktop accessory	ZIT5000-0030
EXTENSIONS WITH SMARTSLOT	Article no.
Radio signal unit for series TASTA	FFL2200-0
Plug-in radio transmitter board	FFL0004-0000
RCP04E plug-in socket radio bell	FFL0001-0000
RCP09 plug-in socket radio bell acknowledgement function	FFL0003-0000

TASTA AUDIO IP

PRODUCT FEATURES

- > VoIP-compatible indoor station for hands-free talking
- > HTTP control functions / SIP call: on function keys
- > Number of acoustic call distinctions: 4 (up to two of which from front-door stations)
- > Voice connection: hands-free talking / push-to-talk communication can be activated
- > Number of selectable ring tones: 13
- > Automatic hands-free talking after internal call: can be activated
- > Audio privacy function: yes
- > Automatic call cut-off: yes
- > Ring tone mute: on call-OFF button
- > Ambient lighting: on light switch button
- > Ring tone volume, volume voice output: adjustable
- > Type of mounting: wall-mount on flush-mount box
- > Housing material: plastic (ASA), white

EXTENDED SETTINGS

- > Door release function: on door release button
- > Light switch function: on light switch button
- > Internal call: can be activated
- > Additional connections: floor push-buttons
- > LED (red): ring tone mute
- > LED (green): door and internal calls (short-term memory), display of a busy line
- > Extendible functionality: Radio signal unit
- > Lower cover: can be pre-installed with inserted screw terminal
- > Error indication: optical and acoustic
- > Commissioning and configuration: manual, with configuration software

AUDIO SPECIFICATION

- > Protocols: IPv4, TCP, UDP, CHCP, HTTP, HTTPS,
- > SIP 2.0, RTP, Syslog, ICMP, ARP
- > Audio Codecs: G.711a/μ / G.722
- > Audio transmission: full duplex
- > Echo compensation: yes
- > Automatic gain control: yes

TECHNICAL DATA


- > Technology: network technology
- > LAN connection: IEEE802.3u 10/100BASE-TX/s, Auto MDIX, connection via screw terminals
- > Voltage supply: IEEE802.3af Mode A (PoE) / 18–26 V DC (DC power supply)
- > Current consumption, maximum (W): 2.5
- > Wall-mounted housing H x W x D (mm): 194 x 94 x 21
- > Acceptable ambient temperature (°C): -5 to +40
- > Protection category: IP30

ACCESSORIES

- > Desktop accessory: ZIT5000-0030
- > SmartSlot FFL: FFL0004-0000
- > Radio signal unit for series TASTA: FFL2200-0

 <https://www.tcsag.de/en/products>

DIMENSIONS (IN MM)



ACCESSORIES



CONTACTS

For design queries, please contact the technical hotline

Phone +49 (0)4194 9881-188
(German landline)

Please direct your queries to

Fax +49 (0)4194 9881-189
E-mail hotline@tcsag.de

Don't forget to check whether subsidies or funding are available!

 <http://www.tcsag.de/kfw>