


TASTA VIDEO IP

IP VIDEO INDOOR STATION

WALL-MOUNT

TCS:
IP

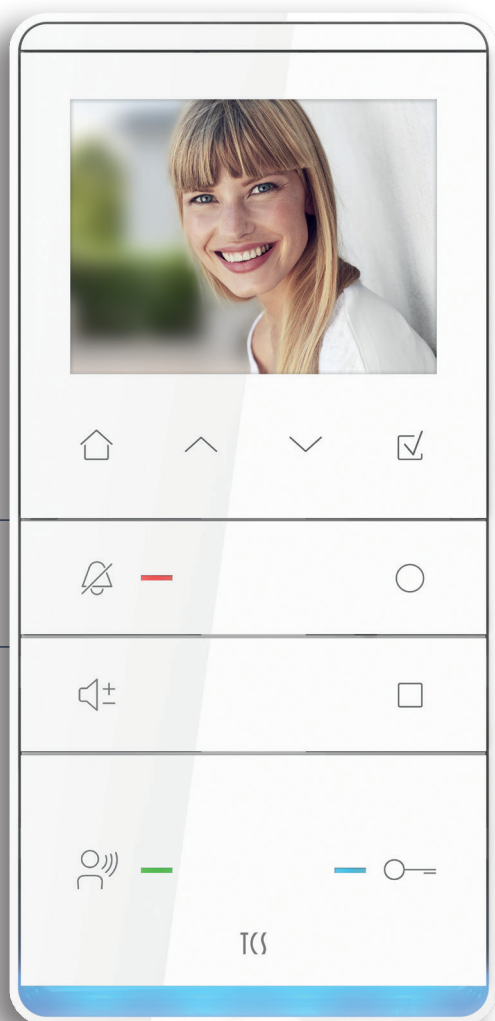

MOUNTING
PLACE FOR
SMARTSLOT

The TASTA IP indoor stations offer an outstanding design and can be integrated along with other devices into IP-based systems. The dimensions of the audio and video devices are the same, making it possible to subsequently exchange an audio device for a video device.

3.5" (8.9 cm) display

Sensor keys for controlling the OSD menu

Up to 5 internal calls and IP cameras (MJPEG)

With ambient lighting and orientation light

Signalling of a door call is possible via the ambient lighting

Visual display of door calls and ring tone cancellation via LED-displays

SmartSlot can be ordered as an extension

Radio signal unit can be ordered for additional signalling of the front door call



VIDEO INDOOR STATION

Article no.

TASTA Video IP

[IVW5411-0145](#)

ACCESSORIES

Article no.

Desktop accessory

[ZIT5000-0030](#)

EXTENSIONS WITH SMARTSLOT

Article no.

Radio signal unit for series TASTA

[FFL2200-0](#)

Plug-in radio transmitter board

[FFL0004-0000](#)

RCP04E plug-in socket radio bell

[FFL0001-0000](#)

RCP09 plug-in socket radio bell
acknowledgement function

[FFL0003-0000](#)

EXTENSIONS



Radio signal unit
for series TASTA



Plug-in
radio transmitter board

TASTA VIDEO IP

IMAGE / VIDEO PROPERTIES

- > Display size (cm/inch): 8.9 (3.5)
- > Display type: Digital display, colour
- > Display resolution (pixel): 320 x 240
- > Display version: white matte
- > Video privacy function: yes
- > Image activation / camera selection: on function key
- > Colour saturation / brightness / contrast: adjustable

PRODUCT FEATURES

- > VoIP-compatible video indoor station for hands-free talking
- > HTTP control functions / SIP call: on function keys
- > Acoustic call distinction: possible
- > Voice connection: hands-free talking
- > Number of selectable ring tones: 13
- > Automatic call cut-off: yes
- > Ring tone mute: on call-OFF button
- > Ambient lighting: on light switch button
- > Ring tone volume, volume voice output: adjustable
- > Type of mounting: wall-mount on flush-mount box
- > Housing material: plastic (ASA), white

EXTENDED SETTINGS

- > Door release function: programmable
- > Light switch function: programmable
- > Internal call: programmable
- > Additional connections: floor push-buttons
- > LED (red): ring tone mute
- > LED (green): door and internal calls (short-term memory), display of a busy line
- > Extendible functionality: Radio signal unit
- > Lower cover: can be pre-installed with inserted screw terminal
- > Error indication: optical/acoustic (total error indication on both LEDs)
- > Commissioning and configuration: manual, with configuration software

AUDIO SPECIFICATION

- > Protocols: IPv4, TCP, UDP, CHCP, HTTP, HTTPS,
- > SIP 2.0, RTP, Syslog, ICMP, ARP
- > Audio codec: G.711a/μ / G.722
- > Audio transmission: full duplex
- > Echo compensation: yes
- > Automatic gain control: yes

TECHNICAL DATA


- > Technology: network technology
- > LAN connection: IEEE802.3u 10/100BASE-TX/s, Auto MDIX, connection via screw terminals
- > Voltage supply: IEEE802.3af Mode A (PoE) / 18–26 V DC (DC power supply)
- > Current consumption, maximum (W): 2.5
- > Wall-mounted housing H x W x D (mm): 194 x 94 x 21
- > Acceptable ambient temperature (°C): -5 to +40
- > Protection category: IP30

ACCESSORIES

- > Desktop accessory: ZIT5000-0030
- > SmartSlot FFL: FFL0004-0000
- > Radio signal unit for series TASTA: FFL2200-0

 <https://www.tcsag.de/en/products>

DIMENSIONS (IN MM)



ACCESSORIES



CONTACTS

For design queries, please contact the technical hotline

Phone +49 (0)4194 9881-188
(German landline)

Please direct your queries to

Fax +49 (0)4194 9881-189
E-mail hotline@tcsag.de

Don't forget to check whether subsidies or funding are available!

 <http://www.tcsag.de/kfw>