

# DOOR PHONE | HANDS-FREE DEVICE

INDOOR STATION AUDIO

SURFACE-MOUNT



Specific opening of front door and floor door

Door release automatic for practices

Internal call from indoor station to indoor station

Call diversion to second indoor station

13 ring tones

Ring tone volume can be adjusted up to 90 decibels

Adjustable voice output

Call distinction of front door, flat door and internal call

Extendable with additional signalling

Optional desktop accessory for setting up

Plastics white

 TCS:  
BUS


## INDOOR STATION

Item no.

Door phone with standard functions

[ISH3030-0140](#)

Hands-free device with standard functions

[ISW3030-0140](#)

Door phone with comfort functions

[ISH3130-0140](#)

Hands-free device with comfort functions

[ISW3130-0140](#)

## ACCESSORY

Item no.

Tabletop device, aluminium natural

[ZIT3030-0010](#)

# DOOR PHONE | HANDS-FREE DEVICE

## PRODUCT FEATURES

- > Audio indoor station with handset/with hands-free talking
- > Type of mounting: surface-mount on flush-mount box/ desktop mounting
- > Type of housing: surface-mount
- > Material of the housing: plastics (matted)
- > Colour of the housing: white
- > Lower cover: pre-installed with plugged screw terminal
- > Number of acoustic call distinctions: 4 (up to 2 from front door stations)
- > Voice transmission: with handset resp. hands-free talking/duplex communication (can be activated)
- > Number of ring tones: 13
- > Automatic hands-free talking after internal call: can be activated <sup>1</sup>
- > Audio privacy function: yes
- > Automatic call cut-OFF: yes
- > Ring tone mute: at call OFF button
- > Ring tone volume: adjustable
- > Volume voice output: adjustable

- > Floor door release function: can be activated <sup>2</sup>
- > LED (red): ring tone mute
- > LED (green): door and internal calls (short-term memory), indication of a busy line
- > Functional extendable: slot for call relay, radio signal device, EnOcean radio interface
- > Mixed installation audio, video, access control: possible
- > Error indication: optical/acoustic (total error indication at both LEDs)
- > Sending sender serial number in case of internal calls: yes
- > Commissioning and configuration: manually, with Service Device, with configuration software

## TECHNICAL DATA

- > Technology: TCS:BUS
- > Number of wires: 2 or 3 necessary
- > Acceptable ambient temperature: -5 to +40 °C

<sup>1</sup> Hands-free device


<sup>2</sup> Door phone and hands-free device with comfort functions

## EXTENDED FEATURES

- > Door release function: at door release button
- > Light switch function: at light switch button
- > Control function: at function button
- > Parallel call: activated
- > Internal call: can be activated <sup>2</sup>
- > Door release automatic: can be activated <sup>2</sup>
- > Call diversion: can be activated <sup>2</sup>

<http://www.tcsag.de/produkte>

## DIMENSIONS (IN MM)

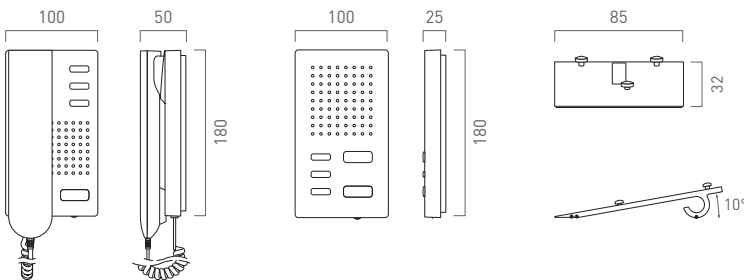

## CONTACT

In case of any questions on planning, please contact our technical hotline

Phone +49 4194 9881-188  
(German landline)

Send your inquiry to

Fax +49 4194 9881-189  
EMail [hotline@tcsag.de](mailto:hotline@tcsag.de)