

## SKYLINE

INDOOR STATION VIDEO

SURFACE-MOUNT | FLUSH-MOUNT



TCS:  
BUS



two-coloured anodised  
natural | black

### VARIANTS

skyline for flush-mount



skyline for surface-mount



5.7" digital display

10 switching functions and 10 call destinations

Receipt of TCS:BUS messages

Polyphonic ring tones

Image with date and time stamp

Central image storage can be used in comfort mode

Detecting angle and zoom can be controlled when using a PTZ camera

Aluminium

Item no.

skyline for surface-mount

[IVW3012-0110](#)

skyline for flush-mount

[IVW3012-0210](#)

Central image storage

[FVM1000-0400](#)

## PRODUCT FEATURES

- > Video indoor station for hands-free talking
- > Type of mounting: surface-mount/flush-mount
- > Type of housing: surface-mounted housing/with flush-mount box
- > Material of the front panel: acrylic glass (shatter-proof)
- > Material of the housing: aluminium
- > Colour of the housing: anodised silver
- > Number of acoustic call distinctions: 4 (up to 2 from front door stations)
- > Voice transmission: hands-free talking/duplex communication (can be activated)
- > Number of ring tones: 13
- > Automatic hands-free talking after internal call: can be activated
- > Audio privacy function: yes
- > Automatic call cut-OFF: yes
- > Call acceptance: at speech button
- > Ring tone mute: at call OFF button
- > Ring tone volume: adjustable

## IMAGE /VIDEO FEATURES

- > Display type: active TFT, colour
- > Display size: 14.5 cm (5.7")
- > Resolution : 640x480 pixel
- > Video privacy function: yes
- > Image activation/camera selection: at image button
- > Camera control: at navigation buttons
- > Colour saturation/brightness/contrast: adjustable
- > Comfort mode: display new images in the central image storage

## EXTENDED FEATURES

- > Door release function: at door release button
- > Door release automatic: can be activated
- > Light switch function: at function button
- > Control function: maximum 10 can be activated
- > Parallel call: can be activated
- > Internal call: can be activated
- > Call diversion: can be activated
- > Additional functions for calling and switching: maximum 10 internal calls/maximum 10 control functions
- > Additional connections: floor push-button
- > Floor door release function: can be activated
- > Floor call: 1 possible
- > LED (red): ring tone mute


- > LED (green): door and internal calls (short-term memory), busy indication, indication for image recording
- > OSD menu: yes
- > Menu control: at menu and navigation buttons
- > Operation indication: OSD menu
- > Error indication: optical/acoustic (total error indication at both LEDs)
- > Receipt of TCS:BUS messages: possible
- > Mixed installation audio, video, access control: possible
- > Commissioning and configuration: manually, with Service Device, with configuration software

## TECHNICAL DATA

- > Technology: TCS:BUS
- > Number of wires: 6 necessary
- > Input current in resting position: 33 mA
- > Maximum input current: 440 mA
- > Recommended mounting height: 1.6 m
- > Acceptable ambient temperature: 0 to +40 °C

<http://www.tcsag.de/produkte>

## DIMENSIONS (IN MM)

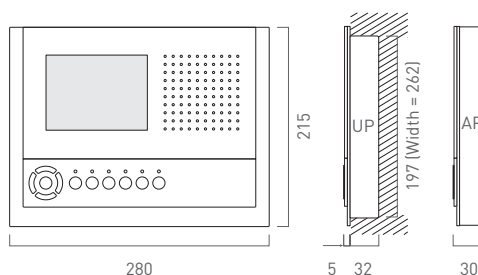

## CONTACT

In case of any questions on planning,  
please contact our technical hotline

Phone +49 4194 9881-188  
(German landline)

Send your inquiry to

Fax +49 4194 9881-189  
EMail [hotline@tcsag.de](mailto:hotline@tcsag.de)