
DATASHEET



VIDEO 2-WIRE TASTA VIDEO

VIDEO 2-WIRE INDOOR STATION VIDEO

WALL-MOUNT

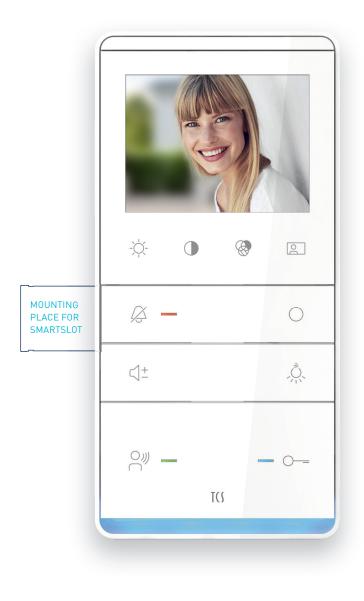

VIDEO 2 DRAHT

8.9 cm (3.5") digital display

Video image setting with sensor keys

With ambient lighting

Signalling of the ring tone via LED-display or ambient lighting

Signalling of the ring tone cancellation via LED-display

SmartSlot can be ordered as an extension

SmartSlot radio signal unit can be ordered for additional signalling of the front door call



VIDE0 2-WIRE INDOOR STATION	Article no.
Video 2-wire TASTA indoor station for hands-	
free talking*	IVW5211-0145
ACCESSORIES	Article no.
Desktop accessory	ZIT5000-0030
TASTA mounting cover for video*	ZIA5002-0145
EXTENSIONS WITH SMARTSLOT	Article no.
	Al licle no.
SmartSlot radio signal unit	FFL2200-0
Plug-in radio transmitter board	FFL0004-0000
RCP04E plug-in socket radio bell	FFL0001-0000
RCP09 plug-in socket radio bell acknowledgement function	FFL0003-0000
* Mounting power included in delivery	

* Mounting cover included in delivery

VIDEO 2-WIRE TASTA VIDEO

PRODUCT FEATURES

- > Video indoor station for hands-free talking
- > Type of mounting: Wall-mount on flush-mount box
- > Type of housing: Wall-mounted housing
- > Housing material: White plastic (ASA)
- > Colour of housing: white
- > Mounting cover: can be pre-installed with inserted screw terminal
- > Number of acoustic call distinctions: 4 (up to two of which from front-door stations)
- > Voice transmission: hands-free talking / push-to-talk communication can be activated
- > Number of selectable ring tones: 13
- > Automatic hands-free talking after internal call: can be activated
- > Audio privacy function: yes
- > Automatic call cut-off: yes
- > Ring tone mute: on call-OFF button
- > Ring tone volume: adjustable
- > Volume voice output: adjustable
- > Door release function: on door release button
- > Light switch function: on light switch button

IMAGE / VIDEO PROPERTIES

- > Display type: colour
- > Display size: 8.9 cm (3.5")
- > Display type: Digital display
- > Display resolution: 320 x 240 pixel
- > Video privacy function: yes
- > Image activation / camera selection: on function key
- > Colour saturation / brightness / contrast: adjustable

EXTENDED SETTINGS

- > Control function: on function key
- > Parallel call and internal call: can be activated

- > Automatic door release, call diversion: can be activated
- > Floor door release function: can be activated
- > LED (red): Ring tone mute
- > LED (green): Door and internal calls (short-term memory), display of a busy line
- > Extendible functionality: SmartSlot, radio signal unit
- > Installation mix of audio, video and access in one system: possible
- > Error indication: optical/acoustic (total error indication on all LEDs)
- Commissioning and configuration: manual, with service device, with > configuration software

TECHNICAL DATA

- > Technology: TCS:BUS
- > Number of wires: 2-wire connection
- > Input current in standby I(av): 2.0 mA
- > Ambient lighting on I(av): 1.40 mA
- > Ambient lighting off l(av max.): 150 mA
- > Wall-mounted housing H x W x D mm: 194x94x21
- > Acceptable ambient temperature: -5 to +40°C
- > Protection category: IP30

EXTENSIONS




Radio signal unit SmartSlot



Plug-in radio transmitter board

DIMENSIONS (IN MM)



ACCESSORIES



TASTA mounting cover for mounting on wall and flush-mount socket (included in delivery)

CONTACTS

For design queries, please contact the technical hotline

Phone +49 (0)4194 9881-188 (German landline)

Please direct your queries to

+49 (0)4194 9881-189 Fax E-mail hotline@tcsag.de



http://www.tcsag.de/en/products